

# 7" Mobile LCD Monitor

Increase driver awareness and passenger safety

Increase driver awareness and protect passengers with the Safe Fleet 7" LCD monitor. Designed for mass transit fleets, this 7" high resolution monitor ensures drivers will see clear images from all desired camera inputs for optimum security and operator confidence.

To address the inevitable blind spots that exist in vehicles without rear windows, the LCD monitor can be combined with the Safe Fleet rear camera to provide operators with distance data relative to other vehicles and obstructions. The Safe Fleet Monitor has a built-in, power-on feature activated during turns and reverses to help eliminate rear fleet collisions and traffic accidents, and facilitate easier, safer lane changes.

- Advanced OSD menu for easy setup
- Supports up to four composite video inputs
- Supports single/dual/triple/quad screen
- Signal trigger inputs
- Auto day and night brightness control via light sensor
- Auto detection for NTSC/PAL
- OSD control for individual normal/mirror camera image for every camera
- Auto power ON when vehicle turns or reverses to prevent unnecessary distractions
- Able to select CAM A/B/C/R's monitoring screen
- Professional metal case ensures performance even in the most demanding environment
- Detachable sunshade for optimal viewing in dynamic lighting conditions



1.877.630.7366  
safefleet.net

SAFE  FLEET  
Driving Safety Forward™

# 7" Mobile LCD Monitor


Increase driver awareness and passenger safety

Specifications	
Pixel configuration	0.107 x 0.370
Viewing angle	UP:40 / Down:60 / Left:60 / Right:60
Power source	DC9.6V ~DC32V
Resolution	1440 (W) x 234 (H)
Contrast ratio	300:01:00
Active area	154.08(H) x 86.58(V)
Brightness	450 cd/m2
Screen size	7 inch (diagonal)
Channel display	Single/Dual/Triple/Quad
Power Outputs	
Power output for each camera	DC12V (350mA Max)
Connector	Molex
Composite Video Inputs	
Input signal	1Vpp
Impedance	75 Ohms
Connector	BNC
Dimensions	
Dimension (WxHxD)	192 x 140.5 x 51.8mm
Weight	N.W./G.W.: 2kg/2.28kg
Environmental	
Operating temperature	-10°C~70°C (14°F ~ 158°F)
Storage temperature	-30°C~80°C (-22°F ~ 176°F)
Humidity	20-80%


## Ordering Information

**MVQ-MISC-MON7 \*** 7" LCD Monitor

\*Mounting bracket not included

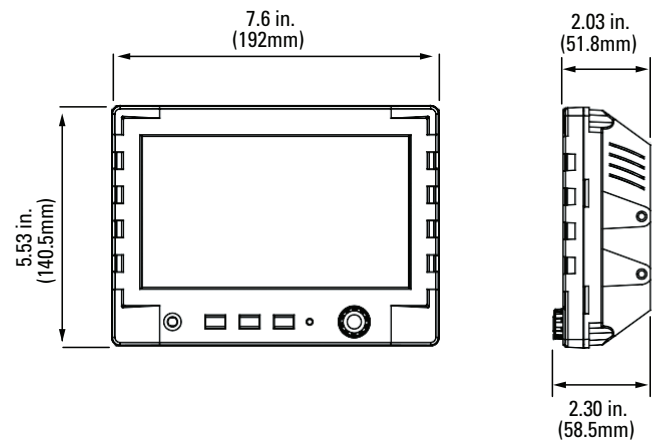

## Mounting Bracket

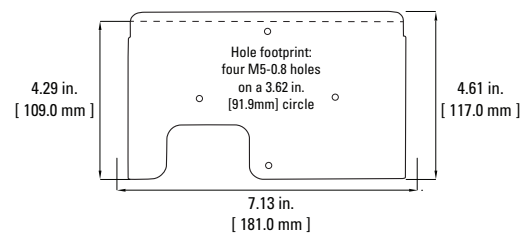

1076-7inch-Monitor-SS-TR-103019

Copyright ©2019 Safe Fleet and its subsidiaries. All rights reserved. No part of this publication may be reproduced by any means without written permission from Safe Fleet. The information in this publication is believed to be accurate. However, Safe Fleet does not make any representation or warranty to that effect and does not assume responsibility for any consequences resulting from use of such information. Revisions or new editions of the publication may be issued (or not issued) in our discretion to incorporate such changes.

1.877.630.7366  
safefleet.net

SAFE FLEET  
Driving Safety Forward™